


GridBee GS-12 submersible mixer thoroughly mixes potable water storage tanks of a wide size range - especially the bottom three feet, the most critical part of the tank. Economical to purchase and operate, the grid-powered, low-voltage GS-12 is easily installed by lowering through any 12" or larger tank hatch. There is no need to enter or drain the tank.


### Features & benefits of the GS-12 submersible mixer:

- Prevent stagnation, thermal stratification, and short-circuiting
- Provide uniform water age and disinfectant distribution
- Impact the tank boundary layers where bacteria builds up
- Reduce nitrification in chloraminated systems
- Reduce ice buildup and tank damage in cold climates
- Use less disinfectant and produce fewer DBPs
  
- Low power consumption with safe low voltage in the tank
- Low-impact feet and endcaps will not damage interior tank coatings
- Certified to NSF / ANSI Std 61-G
- UL-listed, ground-mounted control box; optional SCADA outputs
- Compatible with disinfectant boost and THM removal systems

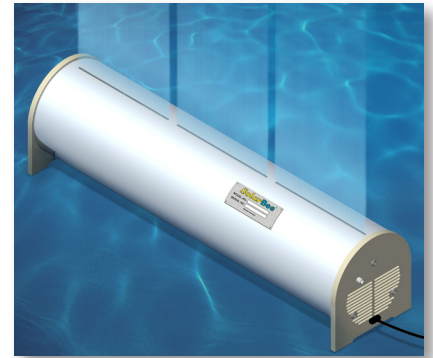


### Specifications:


- Dimensions: 36 inches (92 cm) long, 11.5 inches (30 cm) diameter
- Weight: 70 pounds (32 kg); shipping weight 110 pounds (50 kg)
- Includes 60 feet (18 meters) of power cord and retrieval chain, and tank-roof junction box
- Control box: 110 VAC @ 5 amps in; 48 V @ 10 amps out
- 2-year parts and labor warranty

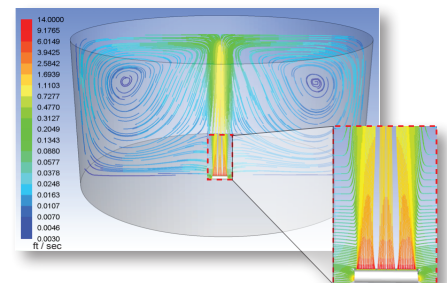

*Flow modeling available for specific tanks*

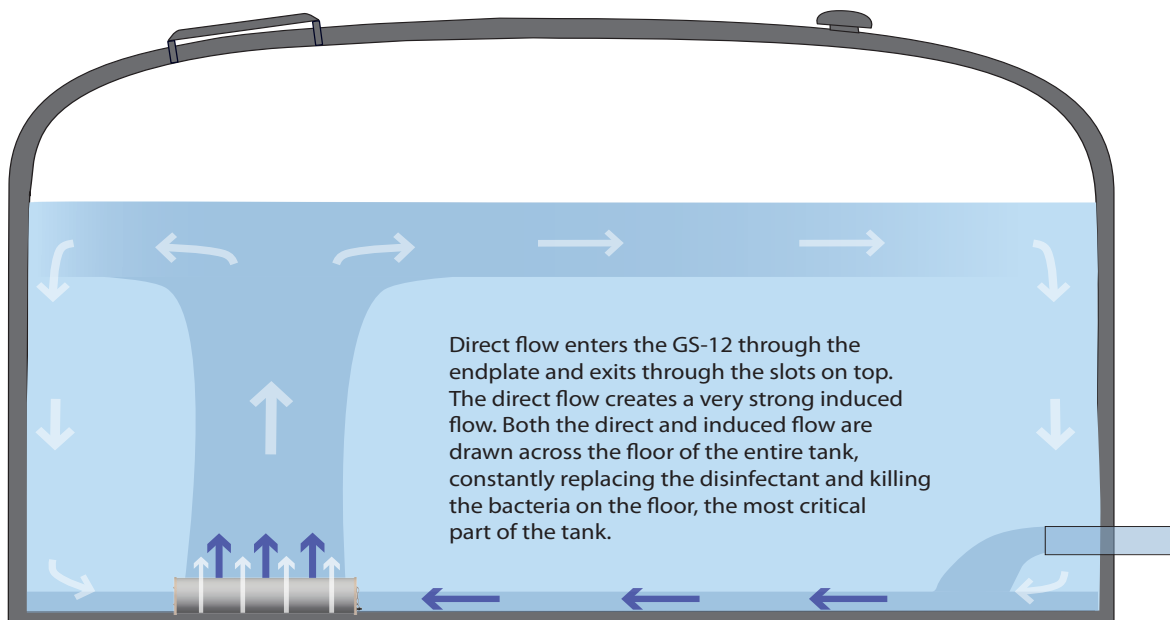


## Installation Overview

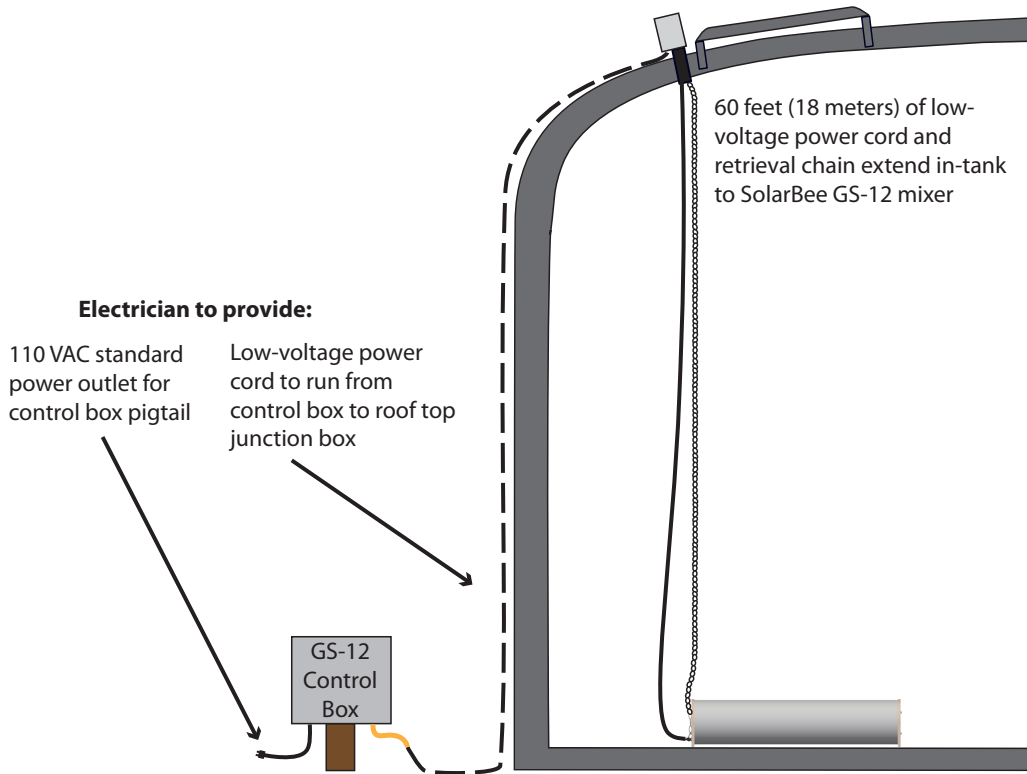

## Package Contents



60 feet (18 meters) of low-voltage power cord and retrieval chain

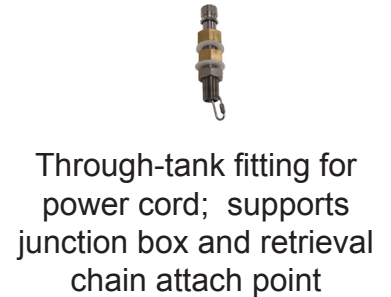

*Locally Represented By:*

### **SolarBee, Inc.**

3225 Hwy 22 • Dickinson, ND 58601  
Ph +1 866 437 8076 • [www.solarbee.com](http://www.solarbee.com)  
GS12\_20110921 • © 2011 SolarBee, Inc.